

THE ALTIMETER PRECISION COMPARISON BETWEEN SAR MODE AND CONVENTIONAL MODE THROUGH AIRBORNE EXPERIMENT

Ke XU¹, Peng LIU^{1,2}, Lingwei SHI¹, Lei WANG^{1,2}, Xiufen YU¹

¹CAS Key Laboratory of Microwave Remote Sensing, National Space Science Center, Chinese Academy of Sciences, Beijing, China, 100190

²The Graduate University of the Chinese Academy of Sciences, Beijing, China, 100049
 xuke@mirslab.cn, liupeng@mirslab.cn, shilingwei@mirslab.cn, wanglei@mirslab.cn, yuxiufen@mirslab.cn

ABSTRACT

Compared with conventional radar altimeter (CRA), synthetic aperture radar altimeter (SARAL) is a new generation radar altimeter and has better height precision and spatial resolution. As using synthetic aperture technique, SARAL data processing is very different from CRA. To verify the performance and the processing algorithm, an airborne experimental system of SARAL is developed. The experimental system was installed in Y-12 aircraft, and a lot of data was obtained in the October 2014. The echo signal with SAR mode and conventional mode are obtained at the same time, so the standard deviations of the two modes are compared. The results indicate that the height precision of SARAL is improved about 1 times. The significant wave height value extracted from the SARAL waveform is very close to that of the buoy deployed at the experiment area.

Index Terms—SARAL, CRA, height precision, airborne flight experiment

1. INTRODUCTION

SARAL (Also called Delay/Doppler altimeter, DDA) uses the synthetic aperture technique in along-track direction, so it is pulse-limited in across-track and beam-limited in along-track [1, 2, 3, 4]. The new technique aims at reducing the measurement noise and increasing the along-track resolution in comparison with CRA[5]. Speckle reduction is obtained by increasing the number of observations. So the precision of the range, the significant wave height (SWH), and the wind speed become better compared with CRA.

In SARAL, a new waveform model [4] and new data processing methods are used. To verify the performance and the processing algorithm, an airborne experimental system of SARAL is developed. The system was installed in Y-12 aircraft with fixed wings, and a lot of data was obtained in the October 2014.

In the flight experiment, the conventional mode data can also be obtained simultaneously by extracting SAR mode

I/Q signal with 1:10 ratio. The measurement precision of the two modes can be compared.

In this paper, the height precision of SARAL, the design of the hardware, the data processing, and the experiment results are analyzed and discussed.

2. THE PRECISION OF RADAR ALTIMETER

2.1. Spaceborne radar altimeter precision analysis

SARAL can provide better height parameter estimates [1, 2]. Using the instrument hardware parameters in Table 1, we can get the height precisions (Table 2) of SAR mode and conventional mode with 1s time resolution. So the height precision of SARAL is about 1 times better than the CRA.

Table 1 The spaceborne instrument hardware parameters

radar wavelength	2.2cm (Ku-band)
pulse bandwidth	320 MHz
antenna beamwidth	1.3 degree
burst rate	85 Hz
Pulse repeat frequency	18KHz
burst duration	11.7 ms
pulses per burst	64
pulse duration	51.2 μs
satellite velocity	7.5 Km/s
satellite height	800 Km

Table 2 The spaceborne instrument range precision of the two modes

SWH(m) Mode	1	2	3	4
CRA (cm)	0.92	1.11	1.35	1.59
SARAL (cm)	0.53	0.63	0.70	0.77

2.2 The main specifications and range precision of airborne radar altimeter

To verify above performance and the data processing (introduced in Sec 4), an airborne experimental system of SARAL is developed. The main specifications of the hardware are the following:

- Operation frequency: 13.58 GHz and 5.41 GHz
- Peak RF power: 1 W
- Pulse width: 12.8 μ s
- Signal bandwidth: 320/80/20 MHz
- PRF: 5 KHz (for SARAL mode)
0.5KHz (for CRA mode)
- Antenna beam width: 25°
- Antenna gain: 17 dB
- Type of onboard tracker: OCOG
- AGC dynamic range: 60 dB
- Number of I/Q sample points: 256
- Flight altitude: 3600 m
- Speed of flight: 250 Km/h

The range precision of CRA and SARAL is calculated with different SWH, and shown in Table 3 (the time resolution is 1 second).

Table 3 The airborne instrument range precision of the two modes

SWH(m) Mode	1	2	3	4
CRA (cm)	2.51	2.62	2.91	3.16
SARAL (cm)	1.30	1.54	1.70	1.85

2.3. The SSH precisions of the airborne altimeter

SSH is an important parameter measured by radar altimeter. It should be corrected by atmospheric refraction corrections, external geophysical adjustments and sea-state bias etc. In this airborne flight experiment, the aircraft's flight height is about 3600 m, and the affect of the atmosphere and ionosphere can be ignored. Sea state and geophysical parameters are unchanged in the experiment area, so they can be ignored when comparing precision in the two modes.

The SSH precision contains two parts, introduced by the altimeter instrument and the flight orbit. The orbit location is determined by differential GPS. Since the orbit precision and instrument precision are independent of each other, the precision of SSH can be expressed as:

$$\sigma_{SSH} = \sqrt{\sigma_{ALT}^2 + \sigma_{GPS}^2} \quad (1)$$

Where σ_{SSH} is the precision of SSH, σ_{GPS} is the precision of airplane locations, σ_{ALT} is the precision of range measured by the altimeter.

The precision of differential GPS is not a constant value at different position and attitude. In this experiment, the orbit radial precision of 1 second is about 2-4 cm, so the final SSH precision is within a numerical interval (in Table 4). However in this experiment, the SAR mode and the

conventional mode are measured at the same time, so the two modes have the same σ_{GPS} . Since the σ_{ALT} of SAR mode is better than that of the conventional mode, the final σ_{SSH} of the SAR mode is also better than the conventional mode.

Using the data in Table 3 and the σ_{GPS} value, the σ_{SSH} is listed in table 4. The σ_{SSH} ratio of the conventional mode and the SAR mode are also calculated, and the ratio is within 1.1~1.3.

Table 4 The analysis SSH precision of airborne instrument and the ratio of conventional mode and SAR mode.

SWH(m) Mode	1	2	3	4
CRA(cm)	3.21 ~4.72	3.30 ~4.78	3.53 ~4.94	3.74 ~5.1
SARAL(cm)	2.38 ~4.2	2.52 ~4.29	2.62 ~4.35	2.72 ~4.4
Ratio	1.12 ~1.34	1.12 ~1.31	1.14 ~1.34	1.16 ~1.38

3. THE AIRBORNE ALTIMETER HARDWARE DISCIPTION

The airborne SAR altimeter hardware consists of antenna unit, microwave front-end, frequency synthesizer, solid power amplifier, transmitting unit, receiving unit, processing unit, and power supply unit.

In SAR mode, the altimeter transmits and receives signal at a fixed Pulse Repetition Frequency (PRF) of 5KHz. The instrument generates either C-Band or Ku-Band pulses (1 C-band pulse surrounded by 64 Ku-band pulses as shown in Fig.1). It should be emphasized that the 64 Ku-band pulses are generated coherently in order to carry out azimuth resolution enhancement by Doppler filtering. After deramping and digital filtering, the echo pulses are sampled by 256 I/Q points. The conventional mode data can be obtained by extracting SAR mode I/Q signal with 1:10 ratio.

4. THE SARAL DATA PROCESSING

4.1. Data processing scheme

SARAL transmits chirp signal towards sea surface and then receive echo signal. After full deramp processing, the echo signal is sampled and stored along track in 2-D data matrix. The next step processing is along track Fourier Transform (AFFT), then the fan-beam sharpening in along track is performed. Before range compression, range correction is performed. The following step is Doppler position map and multi-look processing. Then we can get the SAR mode waveform.

4.2. The mean echo model of SARAL

The mean echo model of SARAL is the convolution of three terms [4, 6, 7], which are the average flat surface impulse response P_{FS} , the point target impulse response of the radar S_r , and the sea wave height probability density function q_s :

$$W(f_{dc}, \tau) = P_{FS}(f_{dc}, \tau) * S_r(\tau) * q_s(\tau) \quad (2)$$

In the equation 2, the f_{dc} is frequency of fan-beam, τ is the two way travel time.

The average flat surface impulse response of the fan-beam corresponding to Doppler frequency could be described as:

$$P_{FS}(f_{dc}, \tau) = \frac{\sigma^0 c \lambda^2}{(4\pi)^3 L_p 2\kappa(\Delta f)^2 h^3} \int_0^{2\pi} G_b(\tau, \Psi, f_{dc}) G(\tau, \Psi, \xi, \Psi_0) d\Psi \quad (3)$$

where c is the electromagnetic velocity, L_p is two-way propagation loss, Δf is Doppler bandwidth, κ is the orbital factor, ξ and Ψ_0 are the radar antenna pointing angle, (τ, Ψ, f_{dc}) is the sharp fan-beam pattern, $G(\tau, \Psi, \xi, \Psi_0)$ is the antenna pattern.

4.3. Waveform retracking

Waveform retracking is the post processing to extract the parameters from the waveform. This paper uses the least squares algorithm to estimate the parameters of the multi-look waveform.

5. THE EXPERIMENT RESULTS

The experiment results are given in this section. The top of Fig.2 shows the 2-D data after along track FFT as described at Sec 4. The bottom of Fig.2 is the echo after doppler correction. Fig.3 presents the waveforms of the two operating modes. Fig.4 illustrates the SSH values obtained in this experiment. The blue line is for the conventional mode, the green line is for the SAR mode, and the red line is for the model value. So the conventional results are more divergent than the SAR results, and that means the SAR altimeter has better precision.

Table 5 The airborne experiment SSH precision ratio of CRA and SARAL

Data Mode	Oct 30th	Oct 31th	Nov 1st
CR (cm)	3.89	4.52	3.99
SAR (cm)	3.04	3.67	2.92
CR/SAR	1.28	1.23	1.37

Table 5 gives the SSH precision ratio of the conventional mode to the SAR mode for three days. The ratios (1.28, 1.23 and 1.37) do agree with the analysis results in Sec 2.3. The

similar results are also given in the literature [8]. So we can see that the range precision of SAR altimeter is better than the conventional altimeter about 1 times.

The SWH value is also extracted from the SAR waveform and conventional waveform, and it is very close to that of the buoy deployed at the experiment area.

6. CONCLUSION

SARAL has the ability to reduce the measurement noise by increasing the number of observations (looks), and by which it can provide better geophysical parameter estimation. In this paper, an airborne experimental system of SARAL is developed to verify the performance and the processing algorithm of SAR altimeter. The results prove that the SARAL has the better performance than CRA.

7. REFERENCES

- [1] R Keith Raney, "The delay/doppler radar altimeter," Transactions on Geoscience and Remote Sensing, vol. 36, no. 5, pp. 1578–1588, 1998.
- [2] J Robert Jensen and R Keith Raney, "Delay/Doppler radar altimeter: Better measurement precision," in Geoscience and Remote Sensing Symposium Proceedings. IEEE, 1998, vol. 4, pp. 2011–2013.
- [3] Le Roy et al., "Sral sar radar altimeter for sentinel-3 mission," in Geoscience and Remote Sensing Symposium, 2007, pp. 219–222.
- [4] Yang Shuang-Bao, Liu He-Guang, Xu Ke, and Xu Xi-Yu, "The mean echo model and data process of sar altimeter," in International Geoscience and Remote Sensing Symposium. IEEE, 2011, pp. 2077–2080.
- [5] Abderrahim Halimi, Corinne Mailhes, J-Y Tournet, Francois Boy, and Thomas Moreau, "Including antenna mispointing in a semi-analytical model for delay/Doppler altimetry," Transactions on Geoscience and Remote Sensing, vol. 53, no. 2, pp. 598–608, 2015.
- [6] Cristina Martin-Puig and Giulio Ruffini, "SAR altimeter retracker performance bound over water surfaces," in International Geoscience and Remote Sensing Symposium. IEEE, 2009, vol. 5, pp. V–449.
- [7] L Phalippou and F Demeestere, "Optimal re-tracking of SAR altimeter echoes over open ocean: From theory to results for siral2," Proc. OSTST Meet, pp. 19–21, 2011.
- [8] Abderrahim Halimi, Corinne Mailhes, J-Y Tournet, Pierre Thibaut, and Francois Boy, "A semi-analytical model for delay/doppler altimetry and its estimation algorithm," Geoscience and Remote Sensing, IEEE Transactions on, vol. 52, no. 7, pp. 4248–4258, 2014.

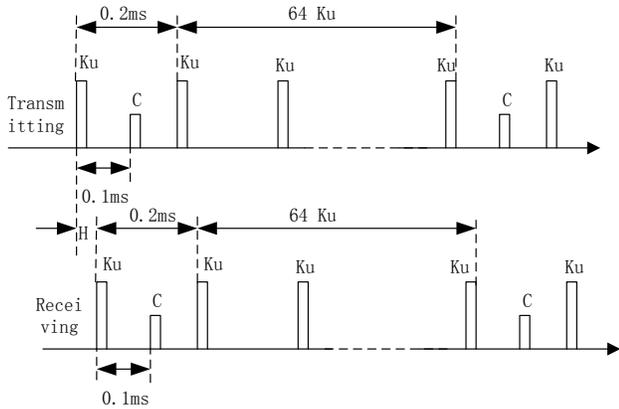


Fig.1 The timing sequence of SARAL

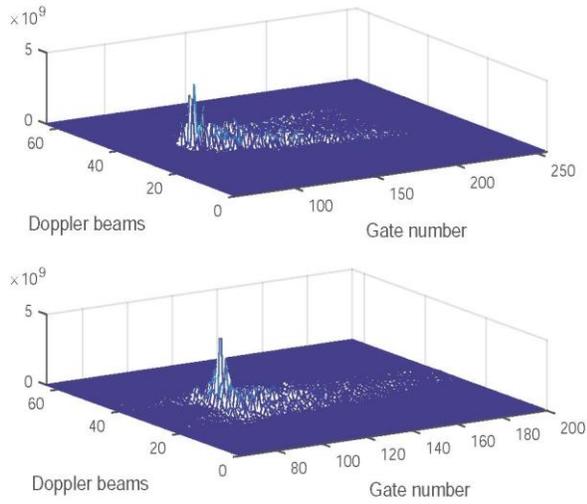


Fig.2 The echoes before and after range correction

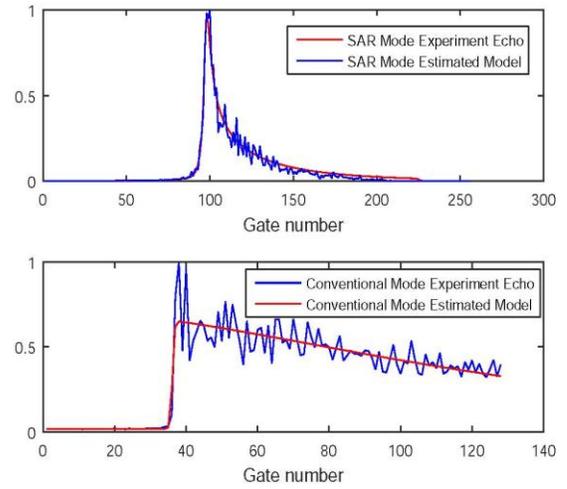


Fig.3 The echo waveforms of SARAL and CRA

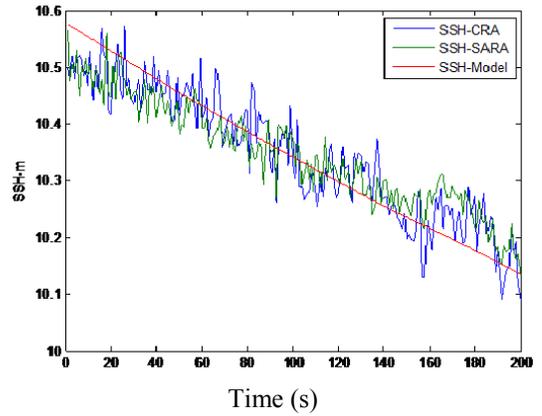


Fig.4 The SSH values (blue is for conventional mode, green is for SAR mode, and the red is for the model value)